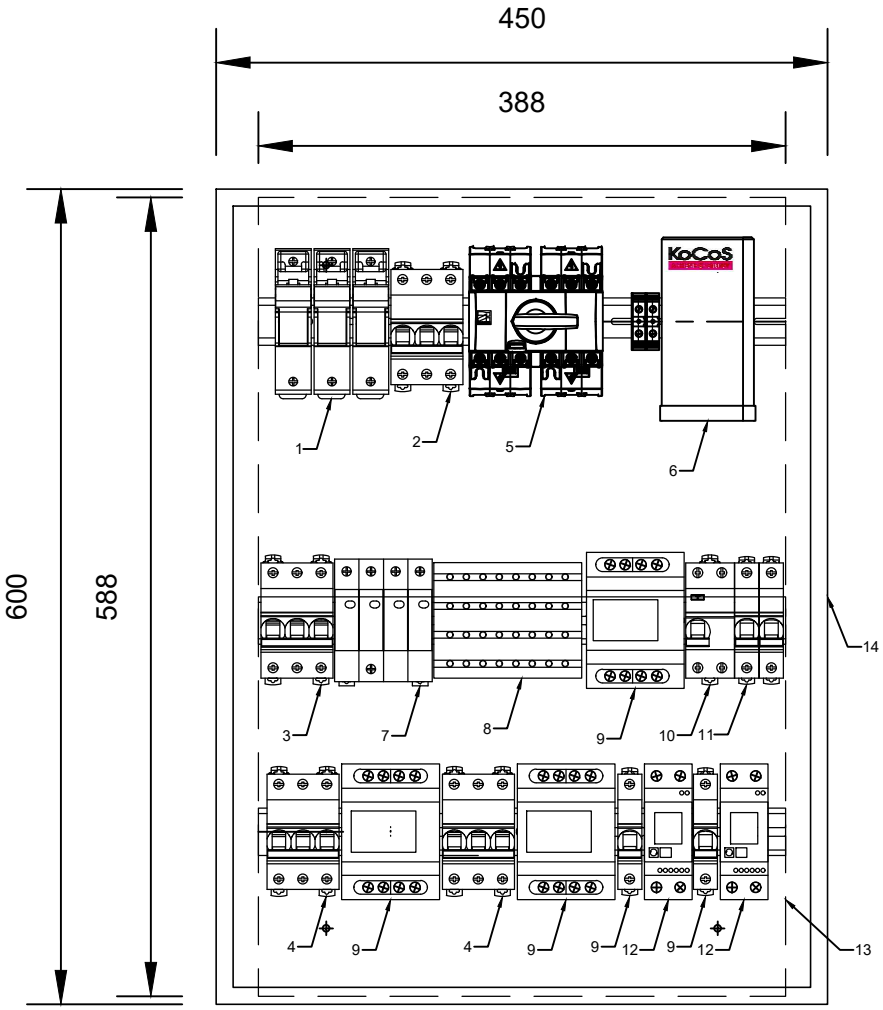


GENERAL NOTES:

*ALL SWITCH GEAR TO BE SCHNEIDER
THIS DRAWING TO BE READ IN CONJUNCTION WITH LINE DIAGRAMS

1. FUSE HOLDERS
2. 1 X 63-Amp 3-Ph CIRCUIT BREAKER
3. 1 X 40-Amp 3-Ph CIRCUIT BREAKER
4. 2 X 25-Amp 3- Ph CIRCUIT BREAKER
5. SOCOMEC CHANGE-OVER SWITCH
6. KoCos MODEM - SUPPLIED BY POWERCOM
7. SURGE ARRESTORS
8. 4 - POLE DISTRIBUTION BLOCK 7 - WAY
9. 3 - Ph kWh METER (SDM630-MT V2) - SUPPLIED BY POWERCOM
10. EARTH LEAKAGE
11. 1 X 16Amp, 1-Ph Circuit Breaker
12. 1 - Ph kWh METER (SDM230 - 2T) - SUPPLIED BY POWERCOM
13. ENCLOSURE CHASSIS
14. MID STEEL ENCLOSURE - 600 X 450mm

REV:	DESCRIPTION:	BY:	DATE:
A	description	by	21/10/2024

GENERAL NOTES

PROJECT NAME: GENERAL AC DB LAYOUT

DRAWING TITLE: AC DB ARRANGEMENT

DRAWN BY:	CHECKED BY:	APPROVED BY:	DATE:
P.B	-	-	00/00/0000

CLIENT NAME & ADDRESS
POWERCOM(PTY)LTD
P.O. BOX 40799,
AUSSPANNPLATZ,
WINDHOEK.
CONTACT NO-0612012090
E-MAIL :info@powercom.na

ARCHITECT:
POWERCOM(PTY)LTD
INFRASTRUCTURE DEPARTMENT
PowerCom (PTY) LTD

PROJECT NO:	SCALE:	SHEET SIZE:
-	0:000	A4

DRAWING NO:	SHEET NO:
-	0 OF 0

REVISION: -

UNIT: -